

# Slim WEB Terminal



With its compact dimensions and public access-oriented design, the Slim WEB Terminal is an attractive way to bring the Internet to any environment. Automated banking design solutions were adapted to assure high performance, durability and maximum uptime. Its modern enclosure also permits the display of advertising materials for such purposes as reinforcing a company image or launching publicity campaigns.

# Slim WEB Terminal


Proof Copy of Translation

## Features:

- **Microprocessor** Pentium® III or equivalent with speeds beginning at 700 MHz.
- **Memory** DIMM, starting at 64 MBytes.
- **Floppy Disk** 3-1/2 inch, 1.44 MBytes.
- **Fixed Disk** IDE, configurable starting at 10 GBytes formatted capacity.
- **Video Monitor** 15.1" LCD, active matrix, 1024 x 768 dot resolution.
- **Keyboard** alphanumeric with 6 quick-access keys on the monitor and 4 navigation keys.
- **Track Ball** with environmental protection.
- **Enclosure** featuring aluminum beams and steel panels with a high-quality finish.
- **Sound Card** Sound Blaster compatible (16 bits) and 2 speakers with stereo amplifier.
- **Front Access** for maintenance and operation.

## Options:

- **Digital video camera.**
- **Acrylic panel** to protect signage.
- **Microphone** for video conferencing.
- **CD-ROM driver** 52X or greater.
- **Magnetic card reader** manual insert type (DIP) to read tracks 1, 2 and 3 and Smart Cards (ABA/ISO standard). Other available options.
- **Receipt printer** 48-column thermal unit capable of printing upper and lower case characters in Portuguese as well as special characters. Guillotine-type cutter for receipt chute. Automatic paper feed unit.
- **Bar code reader** laser type, to read Febraban format documents.
- **Inductive card reader**, electronic format for access billing.
- **Touch screen**
- **Network board** Ethernet 10/100 MBps (10Base2 or 10BaseT). Other communications options available on request.

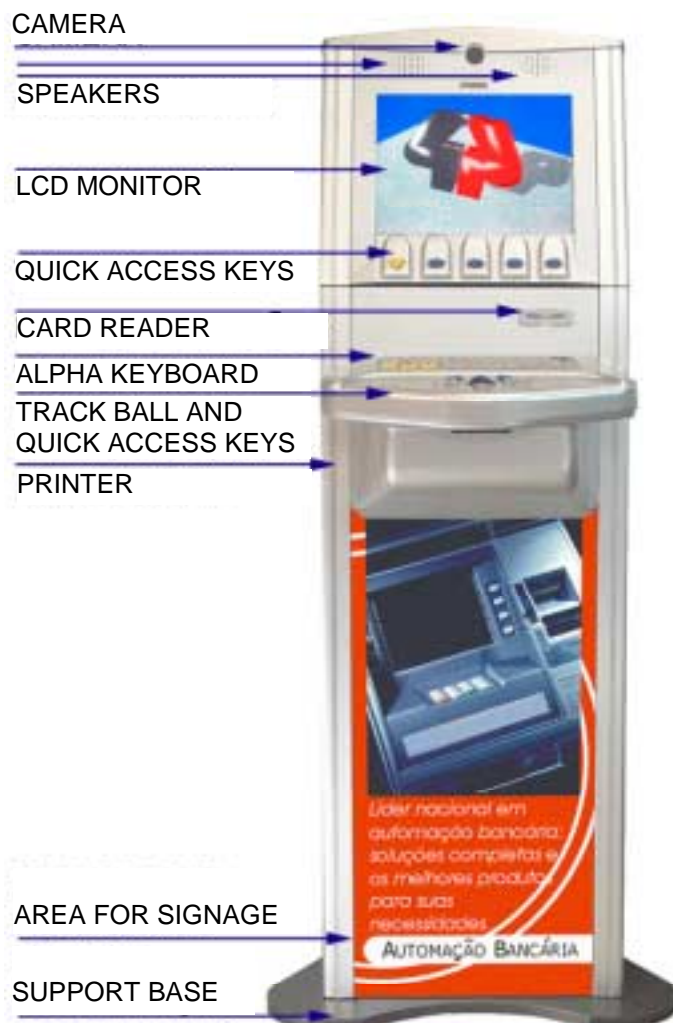

## Maximum dimensions with base and keyboard:

| Height  | Width  | Depth  | Weight |
|---------|--------|--------|--------|
| 1575 mm | 482 mm | 765 mm | 85 kg  |

## Environmental conditions:

|                   |                             |
|-------------------|-----------------------------|
| Temperature       | 5°C to 35°C                 |
| Relative humidity | 10% to 80% (non-condensing) |
| Input voltage     | 110 VAC or 220 VAC          |



Procomp Indústria Eletrônica Ltda

The specifications referenced here are subject to modification without prior notice.

Proof Copy of Translation

Av DR Gastão Vidigal, 2001 São Paulo – SP Brazil Phone: 55-11-3643-3000